



QMT42 Series 400 mm Adjustable Field Sensors


Sensing Cutoff Point is Adjustable from 125 to 400 mm (5 to 16 in)



Features

- Adjustable field technology allows direct detection of objects within a defined sensing field, while completely ignoring reflective objects located beyond the sensing field cutoff point
- Reliable *electronic* adjustment* of sensing field cutoff point from 125 to 400 mm; no mechanical adjustments to worry about
- Compact, rugged, low cost self-contained sensors in metal die cast housings
- Epoxy-encapsulated circuitry; leakproof IP67 (NEMA 6) construction for reliable sensing in harsh environments
- Outstanding electrical noise immunity
- Dual LED system indicates sensor performance
- Choice of integral cable or quick disconnect connector

* Patent Pending



Visible Red, 680 nm



QMT42 Adjustable Field Mode

Models	Range	Cutoff Point	Cable	Supply Voltage	Output Type	Cutoff Point Deviation
QMT42VN6AFV400 QMT42VN6AFV400Q	25 mm (1 in) to Cutoff point	125 to 400 mm (5 to 16 in)	2 m (6.5 ft)	10-30V dc	NPN	
4-pin Euro QD			PNP			
QMT42VP6AFV400 QMT42VP6AFV400Q	2 m (6.5 ft)	4-pin Euro QD				

Interpretation of Performance Curves

The percentage of deviation indicates a change in the cutoff point for either 18% gray or 6% black targets, relative to the cutoff point set for a 90% reflective white test card.

As an example, the cutoff point decreases 10% for a 6% reflectance black target when the cutoff point is adjusted for 400 millimeters (16 inches) using a 90% reflectance white test card. In other words, the cutoff point for the black target is 360 millimeters (14 inches) for this setting.

QMT42 Series 400 mm Adjustable Field Sensors

Adjustable Field Sensing - Theory of Operation

The receiver element of an adjustable field sensor produces two currents: I_1 and I_2 . The *ratio* of these two currents changes as the received light signal moves along the length of the receiver element (see Figure 1). The sensing cutoff distance relates directly to this ratio, which can be adjusted using the sensor's multi-turn potentiometer.

The cutoff distance for model QMT42...AFV400 sensors is adjustable from 125 to 400 millimeters (5 to 16 inches). Objects lying beyond the cutoff distance are ignored, even if they are highly-reflective.

However, it is possible to falsely detect a background object, if it is positioned as shown in Figure 3, or if it moves past the face of the sensor in a direction which is perpendicular to the sensing axis (Figures 2 and 3). To solve this problem, rotate the sensor 90 degrees, as shown in Figure 4.


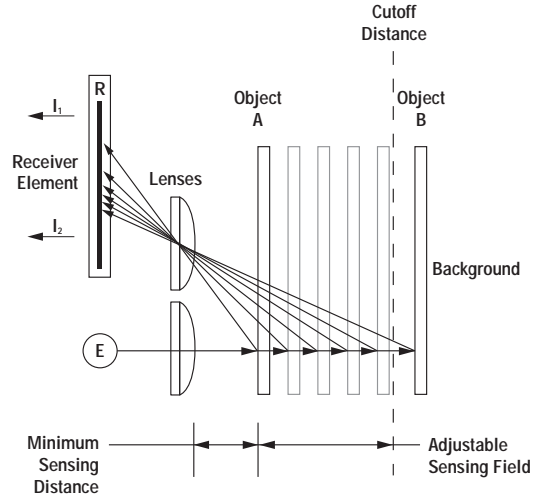


Figure 1: Adjustable Field Sensing Concept



As a general rule, the most reliable sensing of an object which approaches from the side occurs when the line of approach is parallel to the sensing axis.

Figure 2: Sensing Axis

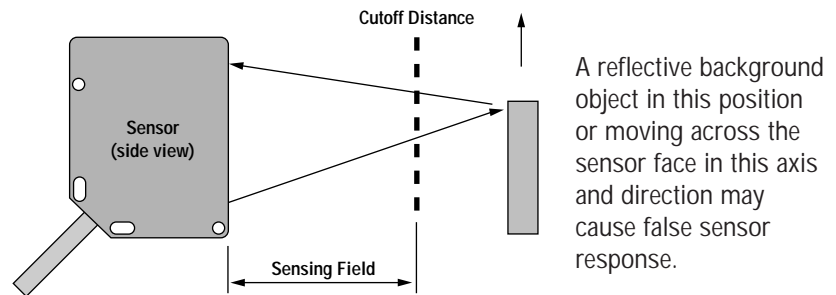


Figure 3: Object Beyond Cutoff Distance - Problem

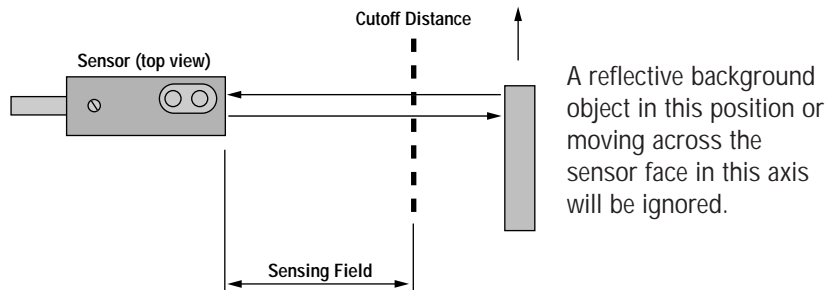



Figure 4: Object Beyond Cutoff Distance - Solution


QMT42 Series 400 mm Adjustable Field Sensors

Product Specifications	
Sensing Beam	Visible Red, 680 nm
Supply Voltage and Current	10 to 30V dc (10% maximum ripple) at less than 50 milliamps
Supply Protection Circuitry	Protected against reverse polarity and transient voltages
Output Configuration	SPDT (complementary) solid-state dc switch; Choose NPN (current sinking) or PNP (current sourcing) models. <i>Light operate:</i> N.O. output conducts when the sensor sees its own (or the emitter's) modulated light <i>Dark operate:</i> N.C. output conducts when the sensor sees dark
Output Rating	100 mA maximum (each output) Off-state leakage current: <5 microamps at 30V dc; On-state saturation voltage: <1V at 10 mA dc; <1.5V at 100 mA dc
Output Protection Circuitry	Protected against false pulse on power-up and continuous overload or short-circuit of outputs Overload trip point ≥ 150 mA, typical, at 20°C
Output Response Time	1 millisecond on and off NOTE: 100 millisecond delay on power-up; outputs are non-conducting during this time
Repeatability of Response	250 microseconds
Sensing Hysteresis	Less than 7% of set cutoff distance
Adjustments	All models have a 15-turn slotted brass cutoff distance adjustment potentiometer (clutched at both ends of travel)
Indicators	Two LEDs: Green and Yellow GREEN glowing steadily = power to sensor is "on" GREEN flashing = output is overloaded YELLOW glowing steadily = light is sensed; normally open output "on" YELLOW flashing = marginal excess gain (1-1.5x) in light condition
Construction	Housings are die-cast zinc alloy with black acrylic polyurethane finish; lenses are acrylic
Environmental Rating	IP67; NEMA 6
Connections	2 m (6-1/2 ft) or 9 m (30-ft) attached cable, or 4-pin euro-style quick-disconnect fitting; Cables for QD models are purchased separately
Operating Temperature	-20° to +55°C (-7° to 130°F); Maximum relative humidity 90% at 50°C (non-condensing)
Certifications	


QMT42 Series 400 mm Adjustable Field Sensors

Dimensions

Cabled models

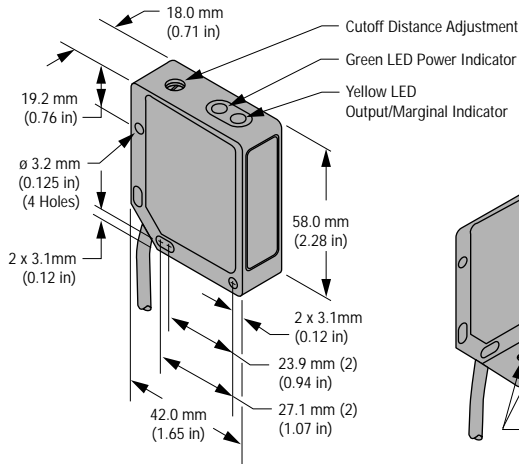


Quick-disconnect models

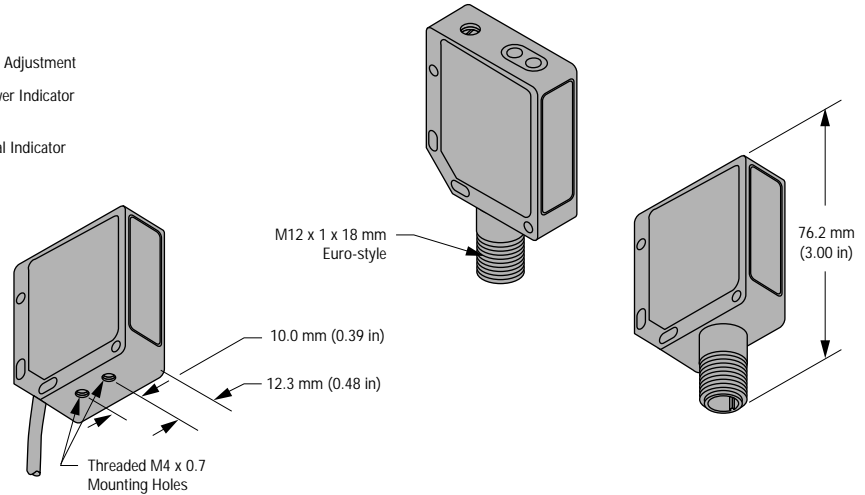


Hookup Diagrams

Sensors with NPN (Sinking) Outputs

Cabled Models

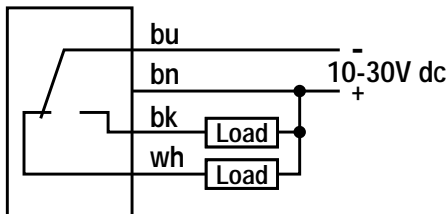


Quick Disconnect Models

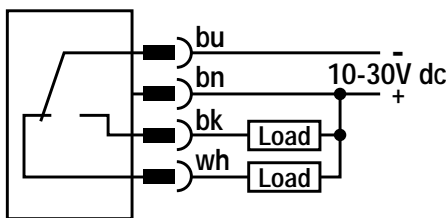


Sensors with PNP (Sourcing) Outputs

Cabled Models

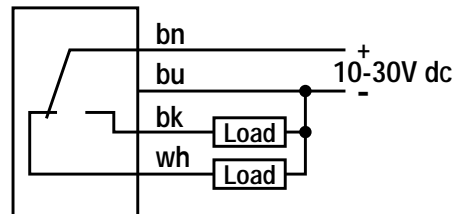




Quick Disconnect Models

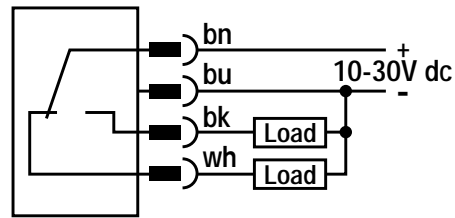




QMT42 Series 400 mm Adjustable Field Sensors

Quick Disconnect (QD) Cables





The following is the selection of cables available for the QMT42 QD models

Style	Model	Length	For use with	Dimensions	Pinout
4-pin Euro Style straight	MQDC-406 MQDC-415 MQDC-430	2 m (6.5 ft) 5 m (15 ft) 9 m (30 ft)	All QMT42 sensors with quick-disconnect fitting		
4-pin Euro Style right-angle	MQDC-406RA MQDC-415RA MQDC-430RA	2 m (6.5 ft) 5 m (15 ft) 9 m (30 ft)			

Mounting Brackets

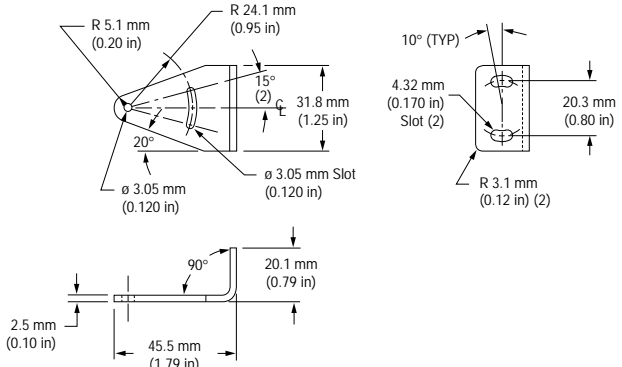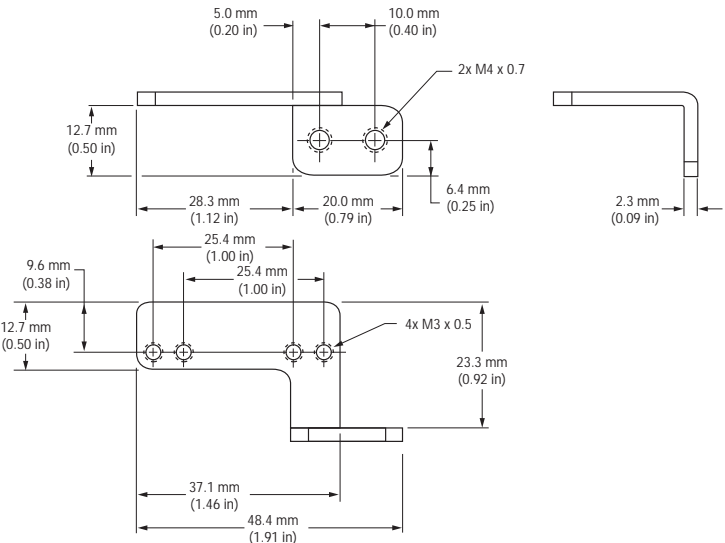Model	Description
SMB19	<p>Right-angle, stainless steel, mounting bracket (M3 mounting hardware is supplied)</p> 
SMB42F	<ul style="list-style-type: none"> • 13 gauge stainless steel • Hardware included  

QMT42 Series 400 mm Adjustable Field Sensors

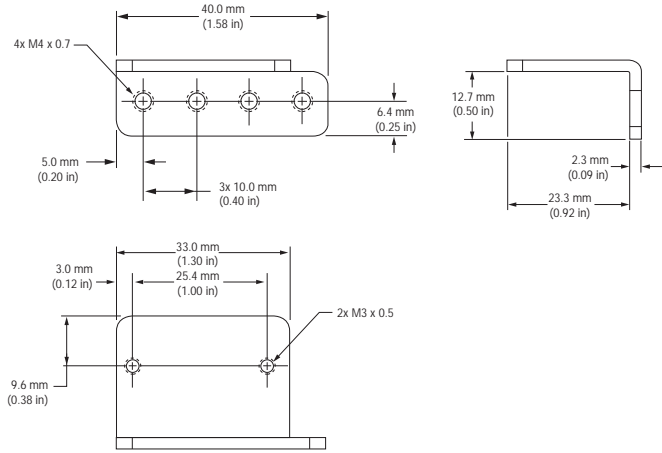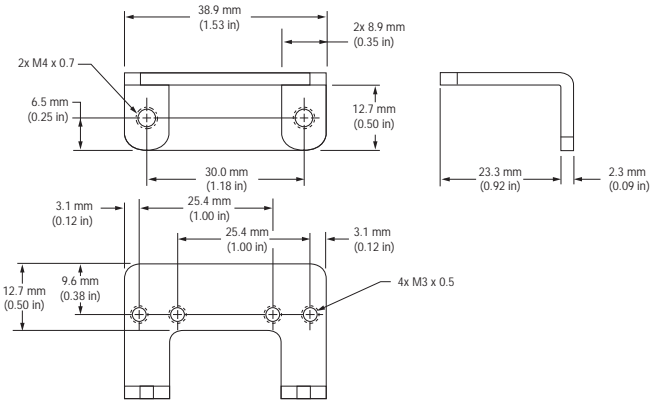Mounting Brackets		
Model	Description	Description
<p>SMB42L</p>	<ul style="list-style-type: none"> • 13 gauge stainless steel • Hardware included 	
<p>SMB42U</p>	<ul style="list-style-type: none"> • 13 gauge stainless steel • Hardware included 	

WARRANTY: Banner Engineering Corporation warrants its products to be free from defects for one year. Banner Engineering Corporation will repair or replace, free of charge, any product of its manufacture found to be defective at the time it is returned to the factory during the warranty period. This warranty does not cover damage or liability for the improper application of Banner products. This warranty is in lieu of any other warranty either expressed or implied.



WARNING These photoelectric presence sensors do NOT include the self-checking redundant circuitry necessary to allow their use in personnel safety applications. A sensor failure or malfunction can result in either an energized or a de-energized sensor output condition.

Never use these products as sensing devices for personnel protection. Their use as a safety device may create an unsafe condition which could lead to serious injury or death.

Only MINI-SCREEN®, MULTI-SCREEN®, MICRO-SCREEN™, MACHINE-GUARD™ and PERIMETER-GUARD™ Systems, and other systems so designated, are designed to meet OSHA and ANSI machine safety standards for point-of-operation guarding devices. No other Banner sensors or controls are designed to meet these standards, and they must NOT be used as sensing devices for personnel protection.