


WFL: Laser fork sensors



A complete range of 21 sensors with the following features is available:

- fork widths between 2 and 120 mm, fork depths of 40, 60 and 95 mm,
- simple and quick adjustment via Teach-in,
- switching output PNP and NPN,
- L/D adjustable via button,
- rugged metal housing with glass optics,
- shortest response time,
- very high resolution.

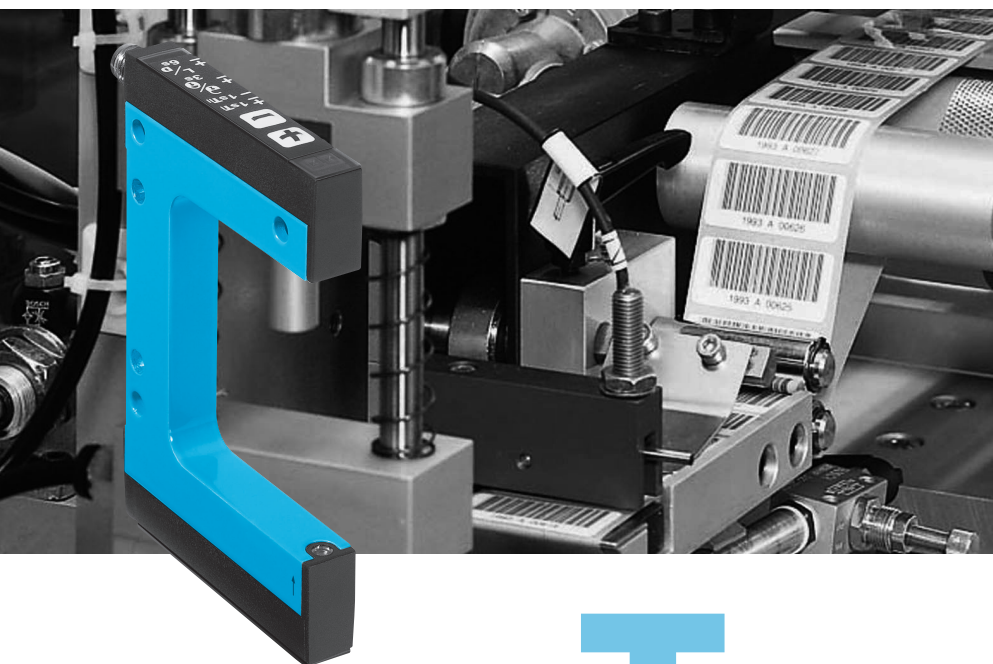

The prime features of the laser fork sensor family are very high speed response time and also an extremely accurate focused laser beam. Sender and receiver are fitted into the same housing, thereby operating on the through-beam sensor principle. This allows and guarantees the highest positional accuracy.



Due to the extremely fast response times and very high resolution, the sensors are particularly suitable for detecting very small objects, such as needles. Additionally, they can be used for the detection of transparent objects.

SICK

Fork width
2 ... 120 mm

Fork sensors


- Very high resolution
- Simple setting using 2-point Teach-in
- Rugged aluminium housing
- High switching frequency for accurate positioning
- Precise and thin laser spot

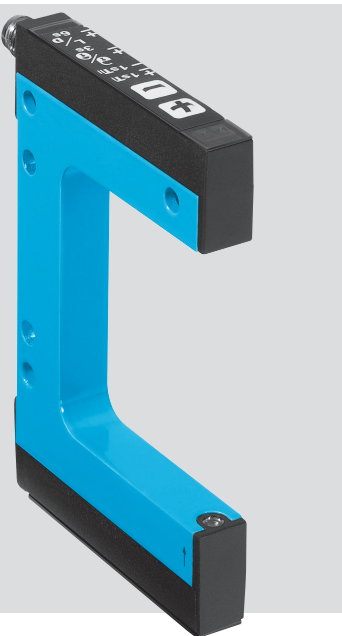

Accessories
Cables and connectors


Dimensional drawing

All types

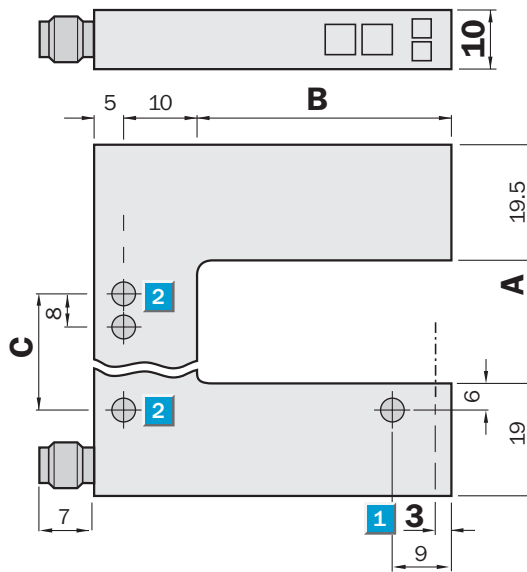

Adjustments possible

All types

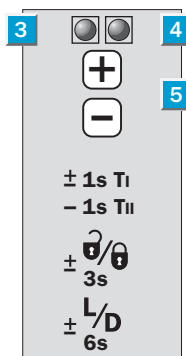


- 1 Optical axis
- 2 Mounting holes, \varnothing 4.2 mm
- 3 Function indicator (red)
- 4 Function indicator (yellow), switching output
- 5 "+" / "-" buttons and function button

Dimensions


Dimensions (mm)	A Fork width	B Fork depth	C
WF2	2	42/59/95	14
WF5	5	42/59/95	14
WF15	15	42/59/95	27
WF30	30	42/59/95	42
WF50	50	42/59/95	40
WF80	80	42/59/95	70
WF120	120	42/59/95	110

Connection types

All types



4-pin, M8



Technical data		WF	2-XX ¹⁾	5-XX ¹⁾	15-XX ¹⁾	30-XX ¹⁾	50-XX ¹⁾	80-XX ¹⁾	120-XX ¹⁾			
			B416	B416	B416	B416	B416	B416	B416			
Fork width	2 mm											
	5 mm											
	15 mm											
	30 mm											
	50 mm											
	80 mm											
	120 mm											
Fork depth	40, 60 or 95 mm											
Light source	Laser, modulated, 670 nm, class 1											
Minimum detectable object size	0.05 mm											
Supply voltage V_S	10 ... 30 V DC ²⁾											
Current consumption ³⁾	40 mA											
Residual ripple ⁴⁾	< 10 %											
Switching output	PNP and NPN											
	Light/dark adjustable via button											
Signal voltage	PNP	HIGH = V _S - (< 2 V)/LOW = 0 V										
	NPN	HIGH = V _S /LOW = < 2 V										
Output current I _A	100 mA											
Stability of response time ⁵⁾	± 20 µs											
Response time ⁵⁾ , switching frequency ⁶⁾	Max. 100 µs; 10,000/s											
Teach-in via button												
Initialisation time	100 ms											
Ambient light safety	Incandescent lamp	5,000 Lux										
	Sunlight	10,000 Lux										
VDE protection class⁷⁾	ⓘ											
Enclosure rating	IP 65											
Circuit protection⁸⁾	A, B, C											
Ambient temperature⁹⁾	Operation	-20 °C ... +50 °C										
	Storage	-30 °C ... +80 °C										
Housing	Aluminium											
Weight	Approx. 36 g to 160 g ¹⁰⁾											

1) XX = Fork depth (E.g. 40 = fork depth equivalent to 40 mm)
 2) Limit values, reverse-polarity protected
 3) Without load

4) May not exceed or fall short of V_S tolerances
 5) Signal transit time with resistive load
 6) With light/dark ratio 1:1; no time delay
 7) Reference voltage 50 V DC

8) A = V_S connections reverse-polarity protected
 B = Outputs short-circuit protected
 C = Interference pulse suppression
 9) Do not bend below 0 °C

10) Depending on fork width


Truth table

Switching type	Light-switching (Q)		Dark-switching (Q̄)	
	Yes	No	Yes	No
Light path free	Yes	No	Yes	No
PNP/NPN output	HIGH	LOW	LOW	HIGH
Function indicator (yellow)	On	Off	Off	On

Order information

Fork depth 40 mm		Fork depth 60 mm		Fork depth 95 mm	
Type	Order no.	Type	Order no.	Type	Order no.
WFL2-40B416	6036821	WFL2-60B416	6036828	WFL2-95B416	6036835
WFL5-40B416	6036822	WFL5-60B416	6036829	WFL5-95B416	6036836
WFL15-40B416	6036823	WFL15-60B416	6036830	WFL15-95B416	6036837
WFL30-40B416	6036824	WFL30-60B416	6036831	WFL30-95B416	6036838
WFL50-40B416	6036825	WFL50-60B416	6036832	WFL50-95B416	6036839
WFL80-40B416	6036826	WFL80-60B416	6036833	WFL80-95B416	6036840
WFL120-40B416	6036827	WFL120-60B416	6036834	WFL120-95B416	6036841

Teach-in: adjusting the switching threshold

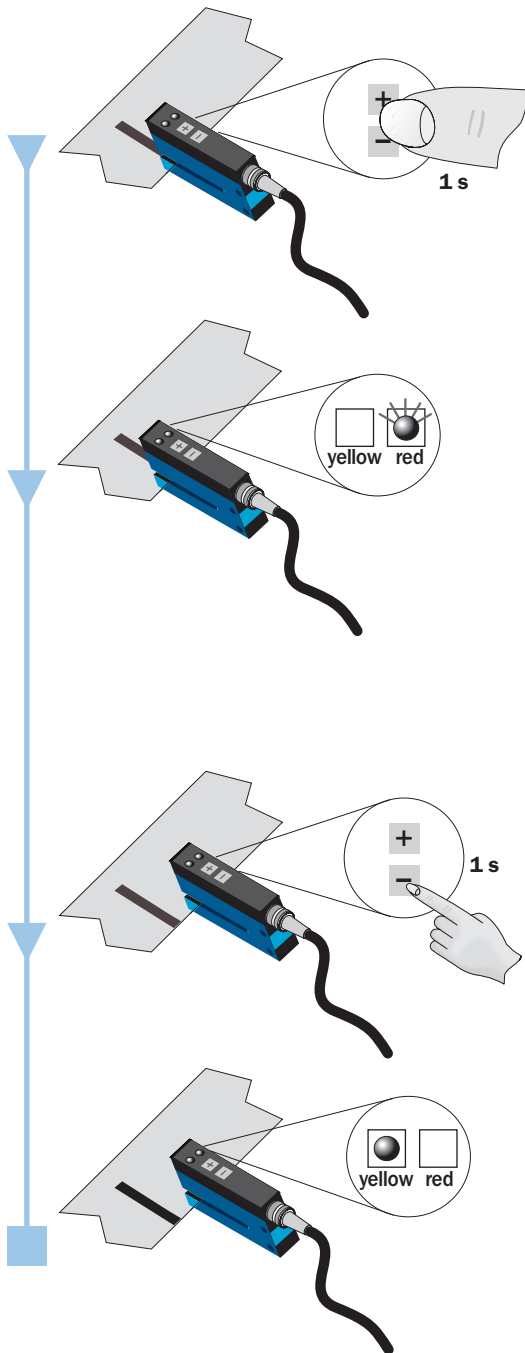

- The material speed during Teach-in must equal zero (machine stationary).

1st operation

- To enter Teach Mode push both buttons (“+” and “-”) for 1 second (no object).
- After the first Teach-in operation, the red function indicator flashes slowly and signals that the second Teach-in operation must now be initiated.

2nd operation

- Briefly operate the “-” button (on carrier material or without scanned object).
- After the second Teach-in operation, the red function indicator extinguishes.
- The Teach-in operation was unsuccessful if the red function indicator flashes.

Notes


- **+** Following completion of the Teach-in operation, the switching threshold can be further adjusted by the “+” or “-” button at any time. For slower adjustment, press the “+” or “-” button once. For faster adjustment, the finger remains on the “+” or “-” button.
- **± 3s** By simultaneously pressing the “+” and “-” buttons (3 seconds), the unit can be locked against unintentional adjustment.
- **± L/D 6s** By simultaneously pressing the “+” and “-” buttons (6 seconds), the switching function (light/dark) can be inverted. Default setting: light switching.

Dimensional drawings and order information

SENSICK screw-in system M8, 4-pin, enclosure rating IP 67


Female connector M8, 4-pin, straight

Type	Order no.
DOS-0804-G	6009974

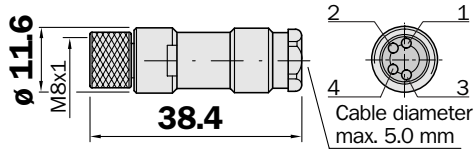

Female connector M8, 4-pin, right angle


Type	Order no.
DOS-0804-W	6009975

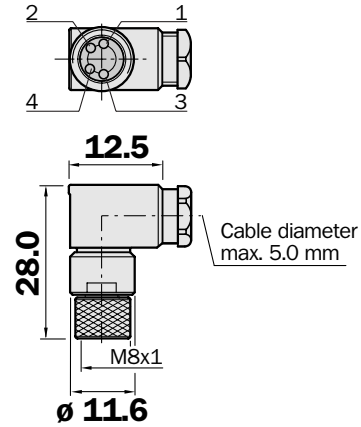

Female connector M8, 4-pin, straight

Cable diameter 5 mm, 4 x 0.25 mm², sheath PVC


Type	Order no.	Order length
DOL-0804-G02M	6009870	2 m
DOL-0804-G05M	6009872	5 m
DOL-0804-G10M	6010754	10 m

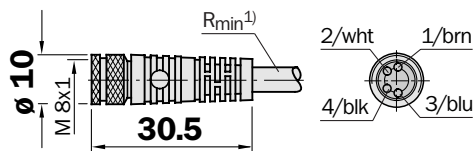

Female connector M8, 4-pin, right angle

Cable diameter 5 mm, 4 x 0.25 mm², sheath PVC

Type	Order no.	Cable length
DOL-0804-W02M	6009871	2 m
DOL-0804-W05M	6009873	5 m
DOL-0804-W10M	6010755	10 m

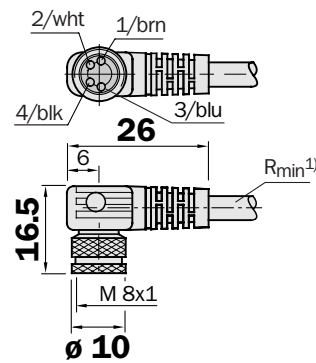

1) Minimum bend radius in dynamic use
 $R_{min} = 20 \times \text{cable diameter}$

Australia

Phone +61 3 9497 4100
1800 33 48 02 - tollfree
E-Mail sales@sick.com.au

Belgium/Luxembourg

Phone +32 (0)2 466 55 66
E-Mail info@sick.be

Brasil

Phone +55 11 3215-4900
E-Mail sac@sick.com.br

Ceská Republika

Phone +420 2 57 91 18 50
E-Mail sick@sick.cz

China

Phone +852-2763 6966
E-Mail ghk@sick.com.hk

Danmark

Phone +45 45 82 64 00
E-Mail sick@sick.dk

Deutschland

Phone +49 211 5301-250
E-Mail info@sick.de

España

Phone +34 93 480 31 00
E-Mail info@sick.es

France

Phone +33 1 64 62 35 00
E-Mail info@sick.fr

Great Britain

Phone +44 (0)1727 831121
E-Mail info@sick.co.uk

India

Phone +91-22-4033 8333
E-Mail info@sick-india.com

Israel

Phone +972-4-999-0590
E-Mail info@sick-sensors.com

Italia

Phone +39 02 27 43 41
E-Mail info@sick.it

Japan

Phone +81 (0)3 3358 1341
E-Mail support@sick.jp

Nederlands

Phone +31 (0)30 229 25 44
E-Mail info@sick.nl

Norge

Phone +47 67 81 50 00
E-Mail austefjord@sick.no

Österreich

Phone +43 (0)22 36 62 28 8-0
E-Mail office@sick.at

Polska

Phone +48 22 837 40 50
E-Mail info@sick.pl

Republic of Korea

Phone +82-2 786 6321/4
E-Mail kang@sickkorea.net

Republika Slovenija

Phone +386 (0)1-47 69 990
E-Mail office@sick.si

România

Phone +40 356 171 120
E-Mail office@sick.ro

Russia

Phone +7 495 775 05 34
E-Mail info@sick-automation.ru

Schweiz

Phone +41 41 619 29 39
E-Mail contact@sick.ch

Singapore

Phone +65 6744 3732
E-Mail admin@sicksgp.com.sg

Suomi

Phone +358-9-25 15 800
E-Mail sick@sick.fi

Sverige

Phone +46 10 110 10 00
E-Mail info@sick.se

Taiwan

Phone +886 2 2375-6288
E-Mail sickgrc@ms6.hinet.net

Türkiye

Phone +90 216 587 74 00
E-Mail info@sick.com.tr

USA/Canada/México

Phone +1(952) 941-6780
1 800-325-7425 - tollfree
E-Mail info@sickusa.com

More representatives and agencies
in all major industrial nations at
www.sick.com